



## P013 SURFACE | OPBOUW

flexible | buigzaam

18,0 mm x 2,4 mm | 50 g/m Rayon de courbure : voir dessin | Buigradius: zie tekening




200 cm  
8101030



**Z019** Clips  
de fixation Mon-  
tageklemmen  
8101037

## DIFFUSEURS | AFDEKKINGEN



**C22** opale/satiné | opaal/gesatineerd | 65 %

PC | 18,0 mm x 4,4 mm

200cm

8600054

600cm

8600055

## EMBOUTS D'EXTRÉMITÉ | EINDKAPPEN



**E60** Silicone | 1 PC/STKS

E60  
8101035





**E61** Silicone | 1 PC/STKS

Câble/Kabel

E61  
8101036

**GALAXY** profiles  
Perfect Light Lines

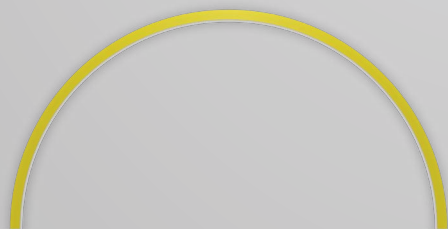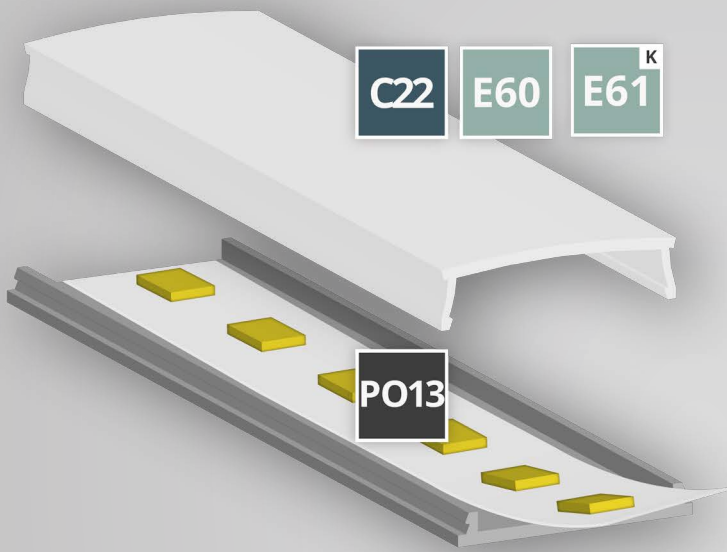

**BENDING RADIUS**  
**BIEGERADIUS**  
**> 40 CM**

### DIFFUSEURS | AFDEKKINGEN

**C22** 65 %    200cm 8600054    600cm 8600055

### EMBOUITS D'EXTRÉMITÉ | EINDKAPPEN


**E60**    E60 8101035

**E61**    E61 8101036

### PROFILE

**PO13**    200cm 8101030

    Z019 8101037

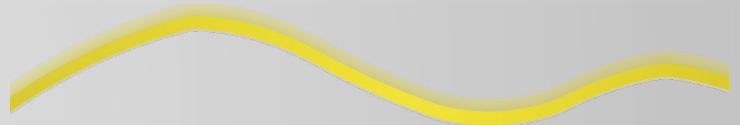

**FLEXIBLE**  
**BUIGBAAR**

